


S. 50-805

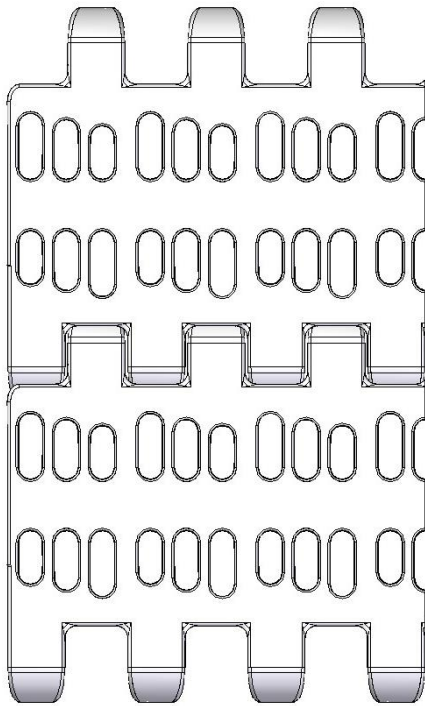

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	1200	7
Polypropylene (PP)	1400	7
Polyacetal (POM)	2060	10

Belt surface: Open belt with a smooth surface
Open area: 26 %. Biggest opening 4 x 11 mm
Strength: The right belt for medium-heavy transportation.
Material/colour: PE/nat and blue, PP/white and grey. POM/blue.
Cleanability: Excellent. FSIS.
Accessories: 25, 50, 75 and 100 mm flights. 75 and 150 mm supported flights. Scoop and bent flights. 50, 75, 100 and 150 mm side guards. Hold-down. Flights fitted with a round top. Medium-heavy duty transportation requiring drainage. Seafood, dairy, vegetables, poultry, snacks, sweet goods and other industries requiring high degree of cleanability. Increments of 20 mm, e.g. 100, 120 mm etc.

Protected by the EU Design Registration

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch-diameter	C= Inside-diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
6	102	89	73	20	20/25/30/40	¾/1/1¼	25 /40	1½
8	136	122	106	35	25/30/40	1/1¼	25/40	1½
10	171	156	140	35	25/30/40	1/1¼	25/40/60	1½/2½
12	205	189	173	35	25/30/40/50/60	1/1¼	25/40/60	1½/2½

